



# CR20/11 CR32/8 系列屏蔽泵 CIRCULATORS PUMP

## Technical Data

Fluid temperature range -10°C~+110°C  
 Max. working pressure 10bar  
 Ambient Temperature Permissible up to 40°C  
 Degree of protection IP54  
 Insulation class F

## 技术数据:

流体温度范围 -10°C~+110°C  
 最大工作压力 10bar  
 最高环境温度 40°C  
 防护等级 IP54  
 绝缘等级 F

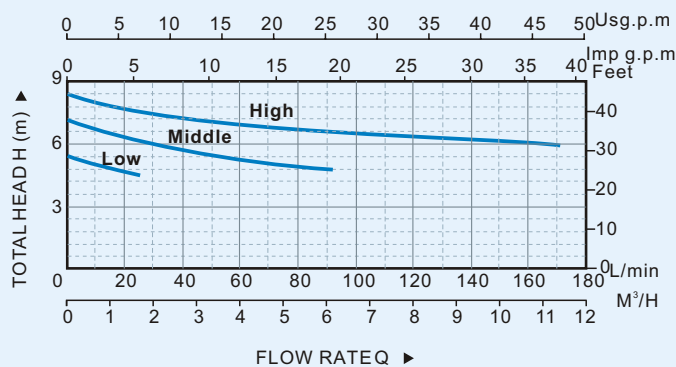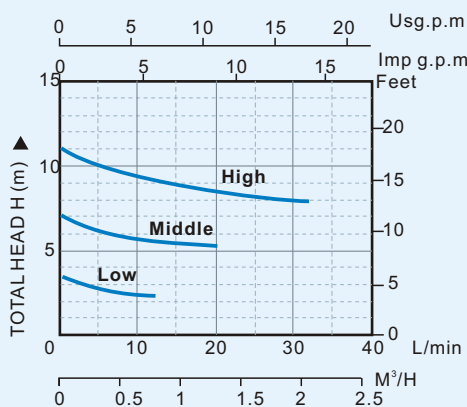

## MOTOR DATA 技术参数

型号 PUMP MODEL	功率 POWER		最大流量 MAX.FLOW L/Min	最大扬程 MAX.HEAD M	进水口/出水口 INLET/OUTLET (MM)(IN)	重量 GW Kg
	KW	HP				
CR20/11(High)	0.165	0.22	32	11	25x25(1")	4.2
CR20/11(Middle)	0.115	0.15	20	7	25x25(1")	4.2
CR20/11(Low)	0.075	0.1	12	3.4	25x25(1")	4.2
CR32/8(High)	0.245	0.33	170	8	51x51(2")	4.7
CR32/8(Middle)	0.220	0.29	95	7	51x51(2")	4.7
CR32/8(Low)	0.145	0.19	25	5	51x51(2")	4.7